
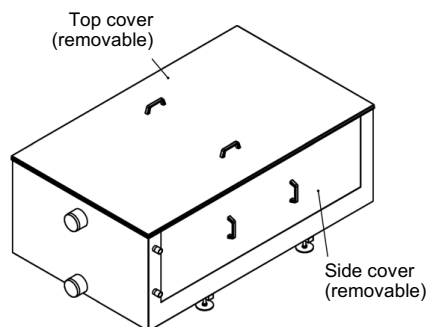
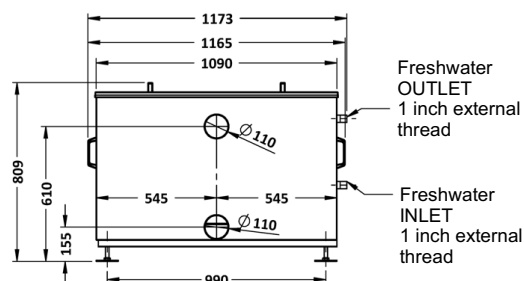



FERCHER Wastewater-Heatexchanger Type **FB-2/S-2-2** - Datasheet

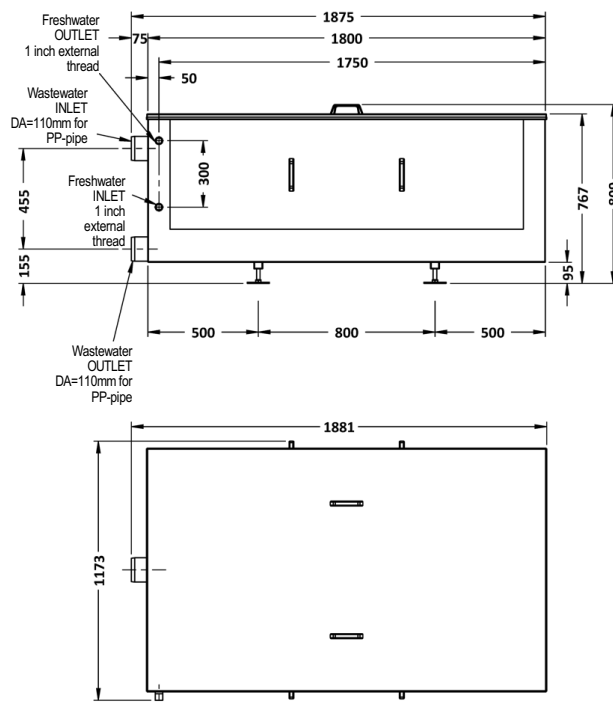

| General | |
|---------------------|-------------------|
| Model-name / Type: | FB-2/S-2-2 |
| Material: | AISI 316L |
| External Dimensions | |
| Length: | 1 875 mm |
| Width: | 1 173 mm |
| Height: | 809 mm |
| Weights | |
| Empty weight: | 206 kg |

| Wastewater | |
|---------------------------|-------------------------------|
| Maximum-Flowrate: | 2,0 L/s |
| Max. allowed temperature: | 100 °C |
| Wastewater-Inlet: | pipe D=110 |
| Wastewater-Outlet: | pipe D=110 |
| Freshwater | |
| Maximum-Flowrate: | 1,0 L/s |
| Max. allowed pressure: | 6 bar |
| Water-Inlet: | 1 inch external thread |
| Water-Outlet: | 1 inch external thread |

Cleaning: Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

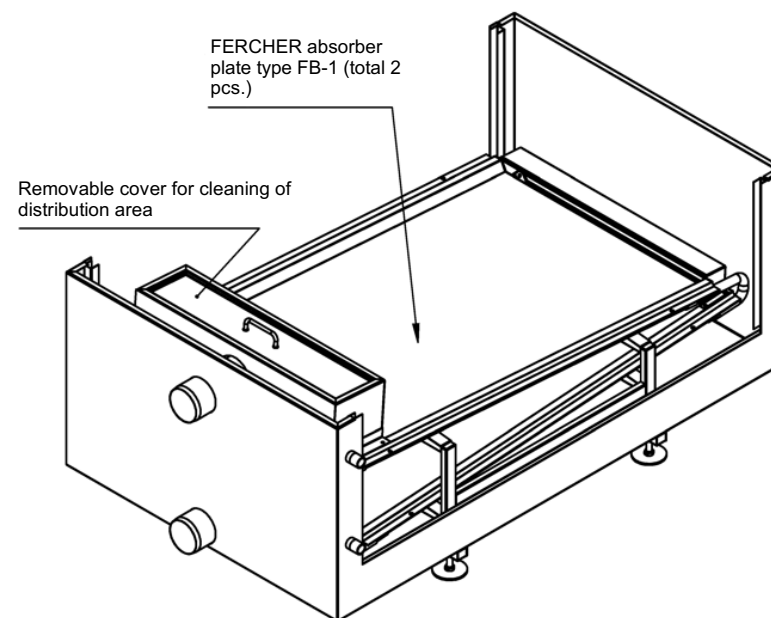

FERCHER Wastewater-Heatexchanger Type **FB-2/S-2-2** - Characteristic curves

Curves are valid for operation with freshwater-IN-temperature of 15°C

For special/individual calculations please contact us at office@fercher.at. We gladly help you with choosing the correct heatexchanger and with calculations.

