


# FERCHER Wastewater-Heatexchanger Type **FB-30/W-2-1** - Datasheet

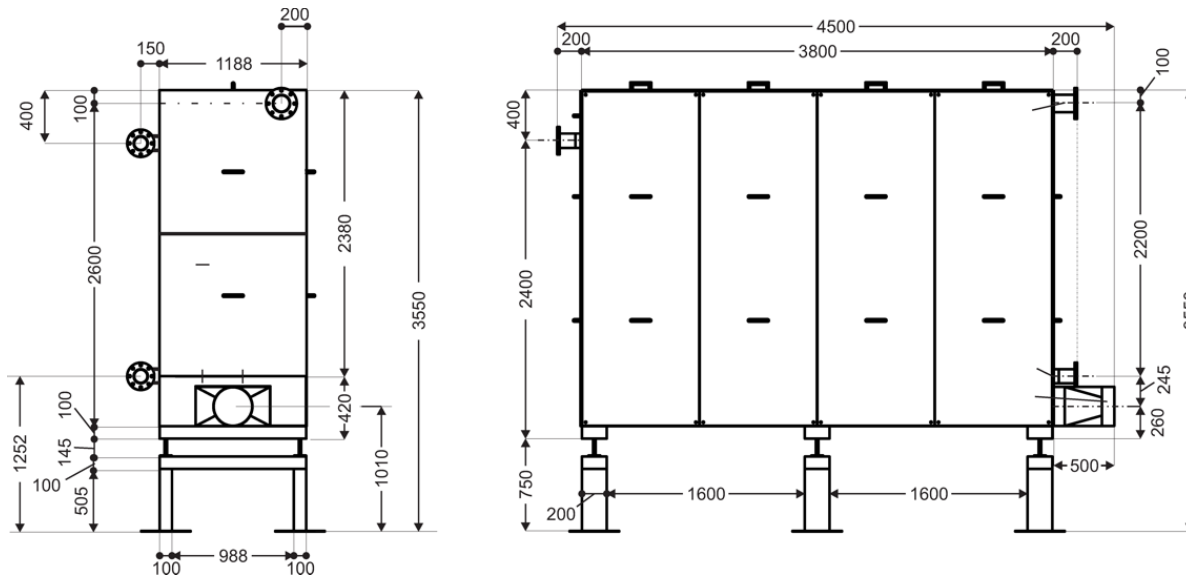

<b>General</b>		<b>Wastewater</b>	
Model-name / Type:	FB-30/W-2-1	Maximum-Flowrate:	30,0 L/s
Material:	AISI 316L	Max. allowed temperature:	100 °C
<b>External Dimensions</b>		Wastewater-Inlet:	flange DN100
Length:	3 660 mm	Wastewater-Outlet:	pipe D=300
Width:	1 580 mm	<b>Freshwater</b>	
Height:	3 484 mm	Maximum-Flowrate:	42,0 L/s
<b>Weights</b>		Max. allowed pressure:	6 bar
Empty weight:	1 775 kg	Water-Inlet:	flange DN100
		Water-Outlet:	flange DN100

**Cleaning:** Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

## FERCHER Wastewater-Heatexchanger Type **FB-30/W-2-1** - Characteristic curves

Curves are valid for operation with freshwater-IN-flow of 30,0 L/s at 15°C

For special/individual calculations please contact us at [office@fercher.at](mailto:office@fercher.at). We gladly help you with choosing the correct heatexchanger and with calculations.

